

Product data sheet

Specifications



Base unit, Harmony GTU, spare part, open box for universal panel

HMIG5U

⚠ Discontinued on: Dec 2, 2020

⚠ End-of-service on: Dec 31, 2020

⚠ Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range Of Product	Harmony GTU
Product Or Component Type	Base unit
Device Short Name	Open Box
Range Compatibility	Harmony GTU
[Us] Rated Supply Voltage	12...24 V DC power supply

Complementary

Integrated Connection Type	Ethernet TCP/IP 2 RJ45 COM1 serial link RJ45 RS485 110...115200 bit/s COM2 serial link SUB-D 9 RS232C/RS422/RS485 110...115200 bit/s Auxiliary port terminal block Expansion unit fieldbus card USB 2.0 port mini B USB DVI-D video port DVI-D Microphone mini-jack USB 2.0 port 3 USB type A
Operating System	Windows Embedded 7
Software Package	Internet Explorer Vijeo Citect web client Vijeo Designer run time .NET framework 4.0 Adobe PDF reader CAD viewer Multimedia player Office reader VNC client/server
Processor Name	Intel X86 1.3 GHz
Data Storage Equipment	16 GB CFAST card
Port Ethernet	10BASE-T/100BASE-TX/1000BASE-T
Memory Description	512 KB NVRAM backup memory 2 GB RAM internal
Width	7.40 in (188 mm)
Height	5.16 in (131 mm)
Net Weight	1.98 lb(US) (0.9 kg)

Environment

Standards	CSA C22.2 No 142 ANSI/ISA 12-12-01 UL 508 Class I division 2 CSA C22.2 No 213 IEC 61132-2
-----------	---

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature For Operation	32...140 °F (0...60 °C)
Ambient Air Temperature For Storage	-4...140 °F (-20...60 °C)
Pollution Degree	2 EN 61131-2 Ed.3
Relative Humidity	10...90 % non-condensing
Operating Altitude	6561.68 ft (2000 m)
Vibration Resistance	3.5 mm constant amplitude 5...9 Hz) EN/IEC 61131-2 9.8 m/s ² 9...150 Hz) EN/IEC 61131-2
Electromagnetic Compatibility	Electrostatic discharge immunity test conforming to EN/IEC 61000-4-2 level 3

Ordering and shipping details

Category	US10MC222567
Discount Schedule	0MC2
Gtin	3606480687211
Returnability	No
Country Of Origin	US

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.31 in (13.5 cm)
Package 1 Width	8.27 in (21.0 cm)
Package 1 Length	10.43 in (26.5 cm)
Package 1 Weight	2.56 lb(US) (1.161 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile


[End of Life Information](#)

California Proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions

External Dimensions

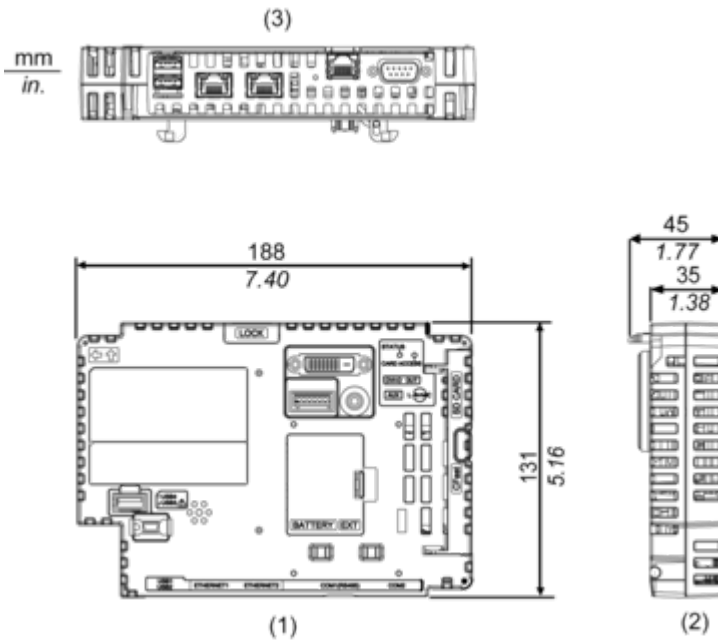

- 1 Front
- 2 Left
- 3 Bottom