

# Product data sheet

Specifications



## base unit, Harmony GTU, open box, 32GB CFast card

HMIG5U2

Product availability: Stock - Normally stocked in distribution facility

**Price\*: 1,764.27 USD**

## Main

|                           |                           |
|---------------------------|---------------------------|
| Range Of Product          | Harmony GTU               |
| Product Or Component Type | Base unit                 |
| Device Short Name         | Open Box                  |
| Range Compatibility       | Harmony GTU               |
| [Us] Rated Supply Voltage | 12...24 V DC power supply |

## Complementary

|                             |   |
|-----------------------------|---|
| Integrated Connection Type  | Ethernet TCP/IP 2 RJ45<br>COM1 serial link RJ45 RS485 110...115200 bit/s<br>COM2 serial link SUB-D 9 RS232C/RS422/RS485 110...115200 bit/s<br>Auxiliary port terminal block<br>Expansion unit fieldbus card<br>USB 2.0 port mini B USB<br>DVI-D video port DVI-D<br>Microphone mini-jack<br>USB 2.0 port 3 USB type A |
| Communication Port Protocol | Modbus<br>Modbus TCP/IP<br>Uni-Telway   |
| Operating System            | Windows Embedded 7  |
| Software Package            | Internet Explorer<br>Vijeo Citect web client<br>Vijeo Designer run time<br>.NET framework 4.0<br>Adobe PDF reader<br>Multimedia player<br>Office reader<br>VNC client/server  |
| Processor Name              | Intel X86 1.33 GHz  |
| Data Storage Equipment      | 32 GB CFast card  |
| Port Ethernet               | 10BASE-T/100BASE-TX/1000BASE-T  |
| Memory Description          | 512 KB NVRAM backup memory<br>2 GB RAM internal   |
| Type Of Cooling             | Natural convection  |
| Width                       | 7.40 in (188 mm)  |
| Height                      | 5.16 in (131 mm)  |
| Depth                       | 1.77 in (45 mm)   |
| Net Weight                  | 1.98 lb(US) (0.9 kg)  |

## Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

|  |   |
|--|---|
| <b>Standards</b>                             | CSA C22.2 No 142<br>ANSI/ISA 12-12-01<br>UL 508<br>Class I division 2 CSA C22.2 No 213<br>IEC 61132-2                   |
| <b>Product Certifications</b>                | CE<br>CULus<br>ATEX<br>IEC-Ex<br>RCM<br>GL<br>KC<br>CUL<br>EAC<br>ABS<br>BV<br>CCS<br>DNV<br>LR<br>RINA<br>UKCA<br>UKEX |
| <b>Ambient Air Temperature For Operation</b> | 32...140 °F (0...60 °C)   |
| <b>Ambient Air Temperature For Storage</b>   | -4...140 °F (-20...60 °C)   |
| <b>Pollution Degree</b>                      | 2 IEC 61131-2 ed.3  |
| <b>Relative Humidity</b>                     | 10...90 % non-condensing  |
| <b>Operating Altitude</b>                    | 2000  |
| <b>Vibration Resistance</b>                  | 3.5 mm constant amplitude 5...9 Hz) IEC 61131-2<br>9.8 m/s <sup>2</sup> 9...150 Hz) IEC 61131-2                         |
| <b>Electromagnetic Compatibility</b>         | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2   |

## Ordering and shipping details

|                          |               |
|--------------------------|---------------|
| <b>Category</b>          | US10MC222567  |
| <b>Discount Schedule</b> | 0MC2          |
| <b>Gtin</b>              | 3606481213785 |
| <b>Returnability</b>     | Yes           |
| <b>Country Of Origin</b> | ID            |

## Packing Units

|                                     |                         |
|-------------------------------------|-------------------------|
| <b>Unit Type Of Package 1</b>       | PCE                     |
| <b>Number Of Units In Package 1</b> | 1                       |
| <b>Package 1 Height</b>             | 5.16 in (13.1 cm)       |
| <b>Package 1 Width</b>              | 8.27 in (21.0 cm)       |
| <b>Package 1 Length</b>             | 10.24 in (26.0 cm)      |
| <b>Package 1 Weight</b>             | 2.78 lb(US) (1.262 kg)  |
| <b>Unit Type Of Package 2</b>       | S04                     |
| <b>Number Of Units In Package 2</b> | 4                       |
| <b>Package 2 Height</b>             | 11.81 in (30.0 cm)      |
| <b>Package 2 Width</b>              | 15.75 in (40.0 cm)      |
| <b>Package 2 Length</b>             | 23.62 in (60.0 cm)      |
| <b>Package 2 Weight</b>             | 12.92 lb(US) (5.862 kg) |

---

|                                     |                           |
|-------------------------------------|---------------------------|
| <b>Number Of Units In Package 3</b> | 48                        |
| <b>Package 3 Height</b>             | 31.50 in (80.0 cm)        |
| <b>Package 3 Width</b>              | 47.24 in (120.0 cm)       |
| <b>Package 3 Length</b>             | 41.34 in (105.0 cm)       |
| <b>Package 3 Weight</b>             | 174.92 lb(US) (79.344 kg) |

---

## **Contractual warranty**

---

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

Rohs Exemption Information Yes

## Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile

[End of Life Information](#)


California Proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Dimensions

---

External Dimensions

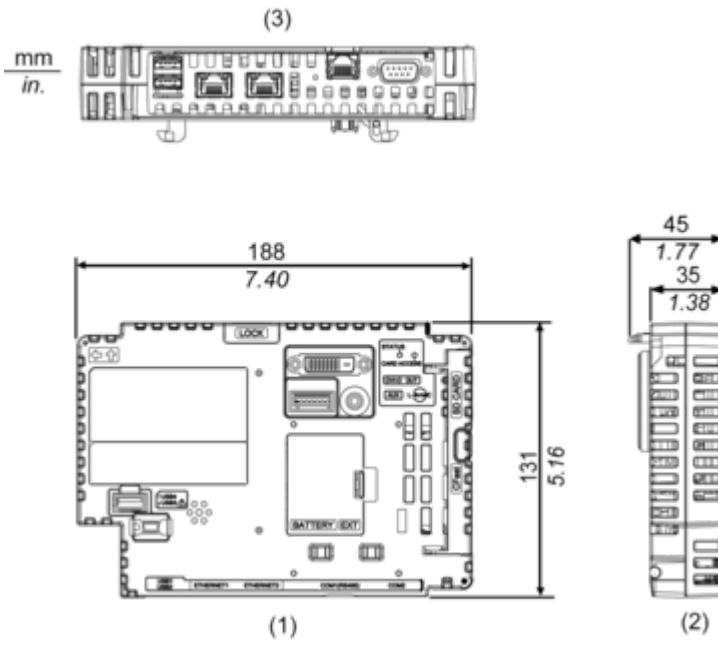

- 1 Front
- 2 Left
- 3 Bottom