


# IE5317



## Inductive sensor

IEA3004-BPKG/4M/PH RT

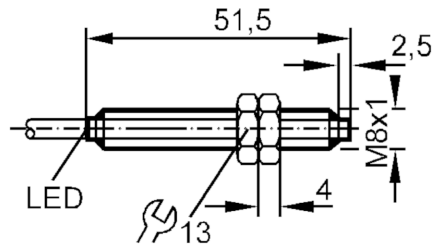

### Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	4
Housing	threaded type
Dimensions [mm]	M8 x 1

### Application

Special feature	Increased sensing range
-----------------	-------------------------

### Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	III
Reverse polarity protection	yes

### Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	800
Short-circuit protection	yes
Overload protection	yes

### Detection zone

Sensing range [mm]	4
Real sensing range Sr [mm]	4 ± 10 %
Operating distance [mm]	0...3.25
Increased sensing range	yes

### Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...20
Switch point drift [% of Sr]	-10...10

# IE5317



## Inductive sensor

IEA3004-BPKG/4M/PH RT

### Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

### Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[years]	2717

### Mechanical data

Weight	[g]	97.5
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M8 x 1
Thread designation		M8 x 1
Materials		brass white bronze coated; sensing face: PBT orange; LED window: PEI; lock nuts: brass white bronze coated
Tightening torque	[Nm]	A = 5 mm: 1 Nm; B: 2 Nm

### Displays / operating elements

Display	switching status	1 x LED, red
---------	------------------	--------------

### Accessories

Items supplied		lock nuts: 2
----------------	--	--------------


### Remarks

Pack quantity		1 pcs.
---------------	--	--------

### Electrical connection

Cable: 4 m, PUR; 3 x 0.14 mm<sup>2</sup>

### Connection

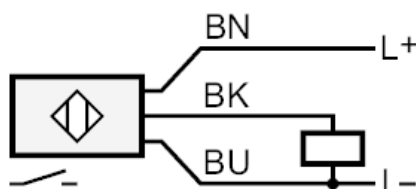

# IE5317



## Inductive sensor

IEA3004-BPKG/4M/PH RT

### Diagrams and graphs

#### Installation

