

IE5348




Inductive sensor

IEB31,5-BPKG/2M PVC

phase-out article

Alternative articles: IE5395

When selecting an alternative article and accessories please note that technical data may differ!



Product characteristics

Electrical design		PNP
Output function		normally open
Sensing range	[mm]	1.5
Housing		threaded type
Dimensions	[mm]	M8 x 1 / L = 20

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	10; (24 V)
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	1.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	4000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		no

Detection zone

Sensing range	[mm]	1.5
Real sensing range Sr	[mm]	1.5 ± 10 %
Operating distance	[mm]	0...1.2

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of Sr]	< 15
Switch point drift	[% of Sr]	-10...10

IE5348



Inductive sensor

IEB31,5-BPKG/2M PVC

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	1045
UL approval	Ta	0...40 °C
	power supply	Class 2
	File number UL	E174191

Mechanical data

Weight	[g]	61
Housing		threaded type
Mounting		flush mountable
Dimensions	[mm]	M8 x 1 / L = 20
Thread designation		M8 x 1
Materials		housing: stainless steel; sensing face: PA 12

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied		lock nuts: 2
----------------	--	--------------


Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

Cable: 2 m, PVC; 3 x 0.14 mm²

Connection

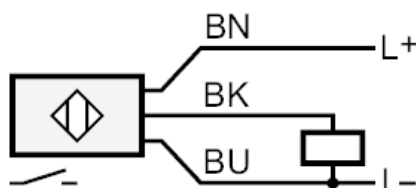

Core colours :
BK = black
BN = brown
BU = blue